



# SR-3000


## Separate Rings $\varnothing 30$ H25.4mm/1"

### Separate rings for low mounting height

Rings: 30 mm  
Tilt: 0 MIL/MOA  
Height: 25.4 mm/1"  
Length: 32 mm/1.26"  
Weight: 175 g/6.2 oz  
Interfaces: 5 sets  
EAN: 7340150700522



The **IDEAL SCOPE MOUNT SYSTEM** series of rings feature **five sets of interfaces** to attach any of more than **40 different accessories** and has bubble levels integrated into the front and rear plane of the rear ring to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

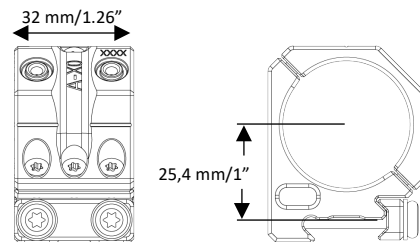

The rings are machined from billet 7000 series aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance and come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a leveling kit.

### NOTE:

The SR-3000 rings can be mounted for either left or right-handed use thanks to bubble levels on both the front and back side of the rear ring.

CONTACT

Spuhr i Dalby AB

Phone: +46 46 712 012

Web: [www.spuhr.com](http://www.spuhr.com)

Address:

Terminalvägen 19

SE-246 42 Löddeköpinge

Sweden