



SR-3006


Separate Rings $\varnothing 30$ H34mm/1.35"

Separate rings for medium mounting height

Rings: 30 mm
Tilt: 0 MIL/MOA
Height: 34 mm/1.35"
Length: 32 mm/1.26"
Weight: 201 g/7.1 oz
Interfaces: 7 sets
EAN: 7340150700737



The **IDEAL SCOPE MOUNT SYSTEM** series of rings feature **five sets of interfaces** to attach any of more than **40 different accessories** and has bubble levels integrated into the front and rear plane of the rear ring to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

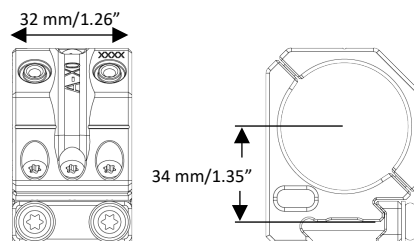

The rings are machined from billet 7000 series aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance and come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a leveling kit.

NOTE:

The SR-3006 rings can be mounted for either left or right-handed use thanks to bubble levels on both the front and back side of the rear ring.

CONTACT

Spuhr i Dalby AB

Phone: +46 46 712 012

Web: www.spuhr.com

Address:

Terminalvägen 19

SE-246 42 Löddeköpinge

Sweden